


## 32 Home Run Manifold System

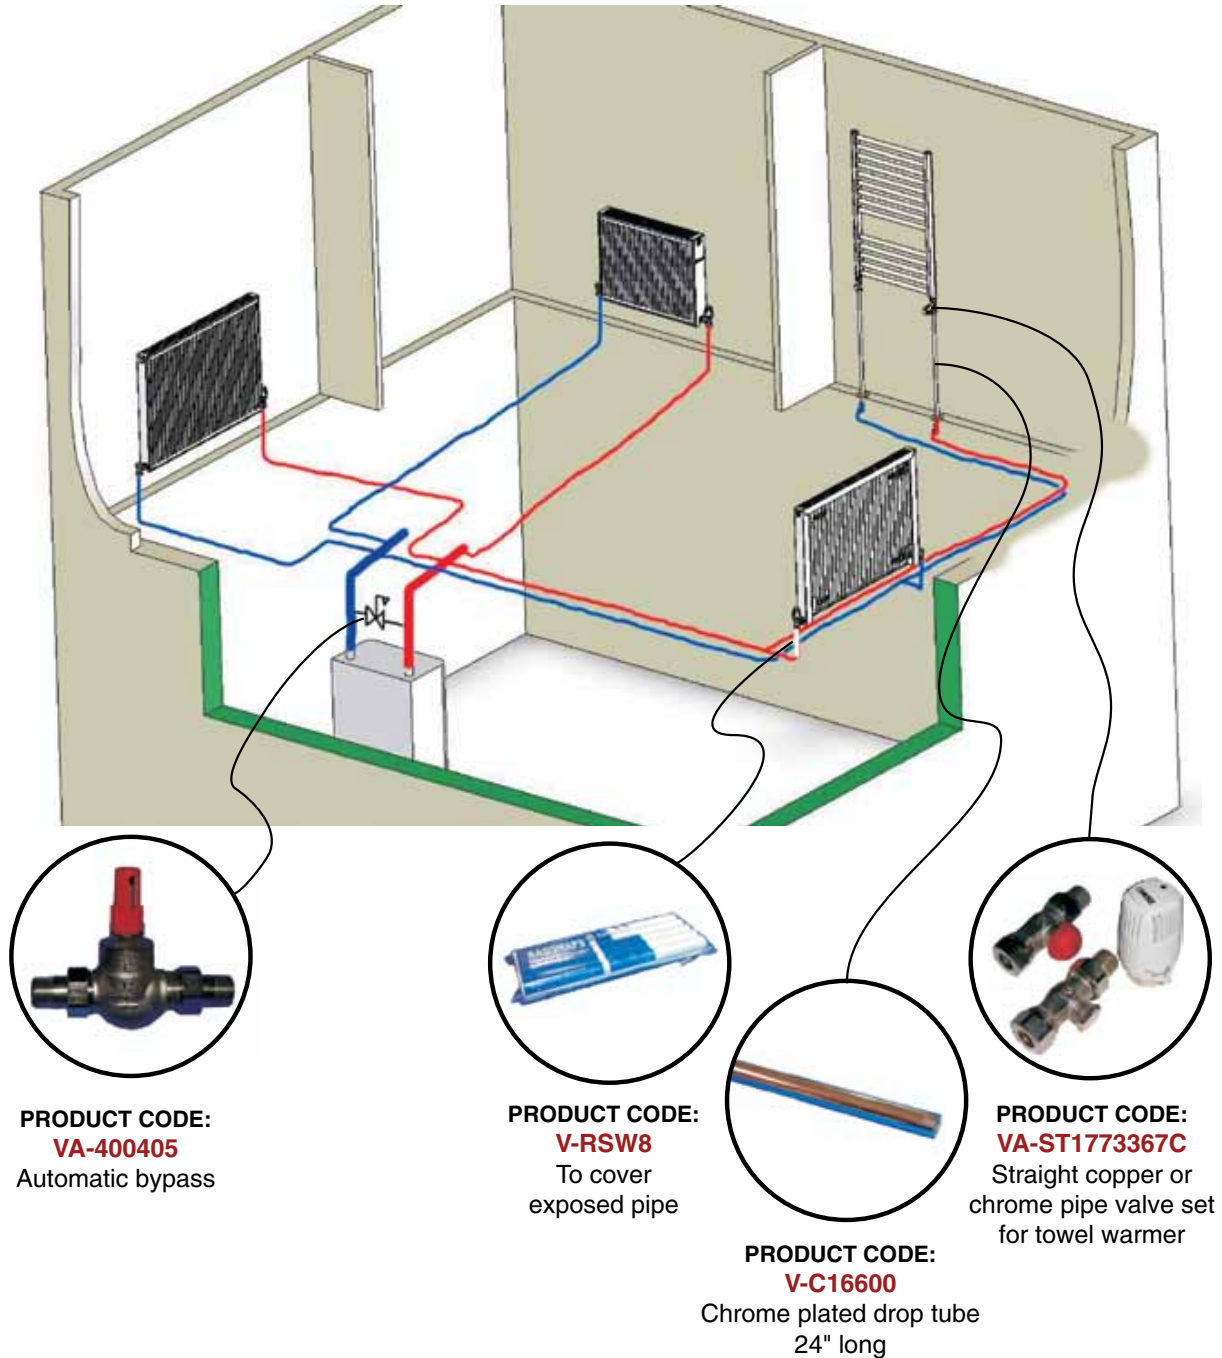

The two manifold piping system uses smaller diameter supply and return tubing for ease and speed of installation. The piping can supply one or more radiators, up to the capacity of the tubing used.

Radiators can be controlled by thermostatic radiator valves or low voltage thermostats. As flow requirements decrease the pipe diameter can also be decreased. This piping arrangement requires lock shield valves to balance each radiator.

This information is intended as a guide only. Use competent qualified installers for pipe sizing and installation.